TLM8

WEIGHT TRANSMITTER - 8 INDEPENDENT CHANNELS - WEIGHING AND BATCHING

LAUMAS®

IP68 IP69K

OMETRYS measurement technologies

DESCRIPTION

- Weight transmitter with 8 independent reading channels with display of the total weight.
- The TLM8 series allows to have same benefits and performance of an advanced digital weighing system even using analog load cells.
- TEST key for direct access to the diagnostic functions.
- Back panel mounting on Omega/DIN rail or junction box (on request).
- Dimensions: 148x92x60 mm.
- Backlit LCD graphic display, resolution: 128x64 pixel, visible area: 60x32 mm.
- 5-key keyboard.
- Extractable screw terminal blocks.
- The instrument can be configured and managed using the free “Instrument Manager” PC software, which you can download from www.laumas.com.

IP68/IP69K AISI 304 STAINLESS STEEL BOXES (on request)

Hygienic version

IP67 POLYCARBONATE BOXES (on request)

8+3 cable glands - plugs



8+3 PVC end-fittings for sheath



INPUTS/OUTPUTS AND COMMUNICATION

- RS485 serial port for communication via protocols ModBus RTU, ASCII Laumas or continuous one way transmission.
- 5 relay outputs controlled by the setpoint values or via protocols.
- 3 optoisolated PNP digital inputs: status reading via serial communication protocols.
- 8 load cell dedicated inputs.

FIELDBUSES

MODBUS RTU MODBUS/TCP ETHERNET POWERLINK certified product DeviceNet EtherNet/IP PI CERTIFIED PROFIBUS • PROFINET

CC-Link PARTNER ASSOCIATION PROFIBUS CC-Link CANopen SERCOS interface ETHERNET TCP/IP EtherCAT

Rev. 0.0

LAUMAS Elettronica srl • Phone: (+39) 0521 683124 • Fax (+39) 0521 681091
UFFICIO VENDITE ITALIA: commerciale@laumas.it • EXPORT SALES DEPARTMENT: sales@laumas.it

ISO 9001
ISO 14001

www.laumas.com

TLM8

WEIGHT TRANSMITTER - 8 INDEPENDENT CHANNELS - WEIGHING AND BATCHING

LAUMAS®

	DESCRIPTION	CODE
	RS485 serial port. Baud rate: 2400, 4800, 9600, 19200, 38400, 115200 (bit/s). 16 bit **analog output.** Current: 0÷20 mA; 4÷20 mA (up to 400 Ω). Voltage: 0÷10 V; 0÷5 V (min 2 kΩ)	TLM8
	CANopen port. Baud rate: 10, 20, 25, 50, 100, 125, 250, 500, 800, 1000 (kbit/s). The instrument works as *slave* in a synchronous CANopen network. Equipped with RS485 serial port.	TLM8CANOPEND
	DeviceNet port. Baud rate: 125, 250, 500 (kbit/s). The instrument works as *slave* in a DeviceNet network. Equipped with RS485 serial port.	TLM8DEVICENETD
	CC-Link port. Baud rate: 156, 625, 2500, 5000, 10000 (kbit/s). The instrument works as *Remote Device Station* in a CC-Link network and occupies 3 stations. Equipped with RS485 serial port.	TLM8CCLINKD
	Profibus DP port. Baud rate: up to 12 Mbit/s. The instrument works as *slave* in a Profibus DP network. Equipped with RS485 serial port.	TLM8PROFIBUSD
	Modbus/TCP port. Type: RJ45 10Base-T or 100Base-TX (auto-sensing). The instrument works as *slave* in a Modbus/TCP network. Equipped with RS485 serial port.	TLM8MODBUSTCPD
	Ethernet TCP/IP port. Type: RJ45 10Base-T or 100Base-TX (auto-sensing). The instrument works in an Ethernet TCP/IP network and it is accessible via web browser. Equipped with RS485 serial port.	TLM8ETHETCPD
	2x Ethernet/IP ports. Type: RJ45 10Base-T or 100Base-TX (auto-sensing). The instrument works as *adapter* in an Ethernet/IP network. Equipped with RS485 serial port.	TLM8ETHEIPND
	2x Profinet IO ports. Type: RJ45 100Base-TX. The instrument works as *device* in a Profinet IO network. Equipped with RS485 serial port.	TLM8PROFINETIOD
	2x EtherCAT ports. Type: RJ45 10Base-T or 100Base-TX (auto-sensing). The instrument works as *slave* in an EtherCAT network. Equipped with RS485 serial port.	TLM8ETHERCATD
	2x POWERLINK ports. Type: RJ45 10Base-T or 100Base-TX (auto-sensing). The instrument works as *slave* in a Powerlink network. Equipped with RS485 serial port.	TLM8POWERLINKD
	2x SERCOS III ports. Type: RJ45 10Base-T or 100Base-TX (auto-sensing). The instrument works as *slave* in a Sercos III network. Equipped with RS485 serial port.	TLM8SERCOSD

Rev. 0.0

TLM8

WEIGHT TRANSMITTER - 8 INDEPENDENT CHANNELS - WEIGHING AND BATCHING

LAUMAS®

CERTIFICATIONS

OIML R76:2006, class III, 3x10000 divisions, 0.2 μV/VSI

UL Recognized component - Complies with United States and Canada standards

Complies with the Eurasian Customs Union standards

Equivalent of the CE marking for the United Kingdom

Complies with United Kingdom regulations for legal for trade use

CERTIFICATIONS ON REQUEST

M	Conformity assessment (initial verification) in combination with Laumas weighing module (CE - UKCA)

TECHNICAL FEATURES

Power supply and consumption	12÷24 VDC ±10%; 5 W
Number of load cells • Load cells supply	up to 16 (350 Ω) - 4/6 wires • 5 VDC/240 mA
Linearity • Analog output linearity (only for TLM8)	<0.01% full scale • <0.01% full scale
Thermal drift • Analog output thermal drift (only for TLM8)	<0.0005% full scale/°C • <0.003% full scale/°C
A/D Converter	8 channels - 24 bit (16000000 points) - 4.8 kHz
Divisions (with measurement range ±10 mV and sensitivity 2 mV/V)	±999999 • 0.01 μV/d
Measurement range	±39 mV
Usable load cells sensitivity	±7 mV/V
Conversions per second	600/s
Display range	±999999
Decimals • Display increments	0÷4 • x1 x2 x5 x10 x20 x50 x100
Digital filter • Readings per second	21 levels • 5÷600 Hz
Relay outputs	5 - max 115 VAC/150 mA
Optoisolated digital inputs	3 - 5÷24 VDC PNP
Serial ports	RS485
Baud rate	2400, 4800, 9600, 19200, 38400, 115200 (bit/s)
Analog output (only for TLM8)	16 bit = 65535 divisions. 0÷20 mA; 4÷20 mA (up to 400 Ω) 0÷10 V; 0÷5 V (min 2 kΩ)
Humidity (condensate free)	85%
Storage temperature	-30 °C +80 °C
Working temperature	-20 °C +60 °C

c UL us	Relay outputs	5 - max 30 VAC, 60 VDC/150 mA
	Working temperature	-20 °C +60 °C
	Equipment to be powered by 12-24 VDC LPS or Class 2 power source	

METROLOGICAL SPECIFICATIONS OF TYPE-APPROVED INSTRUMENTS	OIML
Applied standards by region	EU: 2014/31/UE - EN45501:2015 - OIML R76:2006 United Kingdom: Non-automatic Weighing Instrument Regulations 2016
Operation modes	single interval, multi-interval, multiple range
Accuracy class	III or IIII
Maximum number of scale verification divisions	10000 (class III); 1000 (class IIII)
Minimum input signal for scale verification division	0.2 μV/VSI
Working temperature	-10°C +40°C

LAUMAS Elettronica srl • Phone: (+39) 0521 683124 • Fax (+39) 0521 681091
UFFICIO VENDITE ITALIA: commerciale@laumas.it • EXPORT SALES DEPARTMENT: sales@laumas.it

ISO 9001
ISO 14001

TLM8

WEIGHT TRANSMITTER - 8 INDEPENDENT CHANNELS - WEIGHING AND BATCHING

LAUMAS®

MAIN FUNCTIONS

- 8 independent channels for load cells: monitoring and direct management of each connected load cell.
- Immediate reporting of anomalies (also on the connected weight indicator display).
- TLM8 functions can be managed by a W series weight indicator connected via RS485 serial port (excluding instruments with graphic display) or remotely via the communication interfaces.
- Digital equalization of the 8 channels.
- Load distribution analysis on the 8 channels with backups archive: storing, consultation, printing.
- Single channel overload function.
- Detailed diagnostics of each load cell (max 8): depending on the type of weighing system you can perform:
  - load automatic diagnostics;
  - automatic diagnostics on zero.
- Tilt compensation of the weighing system up to ±10 degrees via inclinometer (not included). The weight correction is also valid for systems approved for legal for trade use.
- Archive of the last 50 significant events (zeroing, calibration, equalization, alarms): storing, consultation, printing.
- Transmission via RS485 (Modbus RTU) or fieldbus of the divisions for the 8 reading channels. Only the points of each load cell connected are transmitted, with no filter applied; the calculation of the weight value, the zero setting and calibration are made by the customer.
- Transmission of load distribution percentages via RS485 (Modbus RTU) or fieldbus.
- Connections to:
  - PLC via analog output and fieldbus;
  - PC/PLC via RS485 (up to 99 instruments with line repeaters, up to 32 without line repeaters);
  - remote display, inclinometer and printer via RS485;
  - up to 16 load cells in parallel;
  - W series weight indicator via RS485.
  - IoT gateway for cloud connection via RS485.
- TCP/IP WEB APP: integrated software in combination with the Ethernet TCP/IP version for remote supervision, management and control of the instrument.
- Digital filter to reduce the effects of weight oscillation.
- Possibility to define the condition of stable weight.
- Theoretical calibration (via keyboard) and real calibration (with sample weights and the possibility of weight linearization up to 8 points).
- Tare weight zero setting.
- Automatic zero setting at power-on.
- Gross weight zero tracking.
- Semi-automatic tare (net/gross weight) and preset tare.
- Semi-automatic zero.
- Direct connection between RS485 and RS232 without converter.
- Hysteresis and setpoint value setting.

Approved versions for legal for trade use

- System parameters management protected by qualified access via software (password), hardware or fieldbus.
- Weight subdivisions displaying (1/10 e).
- Three operation mode: single interval or multiple ranges or multi-interval.
- Net weight zero tracking.
- Calibration.
- Alibi memory (option on request).

BATCHING PROGRAM

- Settable dosage formula.
- Automatic fall calculation.
- Tolerance error control.
- Precision batching through slow function.
- Precision batching through tapping function.
- Consumption storage.
- Printing of batching data.
- Alarm contact management.
- Batching start via external contact or fieldbus.
- Autotare at batching start.

8 INDEPENDENT CHANNELS

The screen shows the standard automatic operating mode: the activation/deactivation status of each channel indicates the presence/ absence of connection with the load cells.

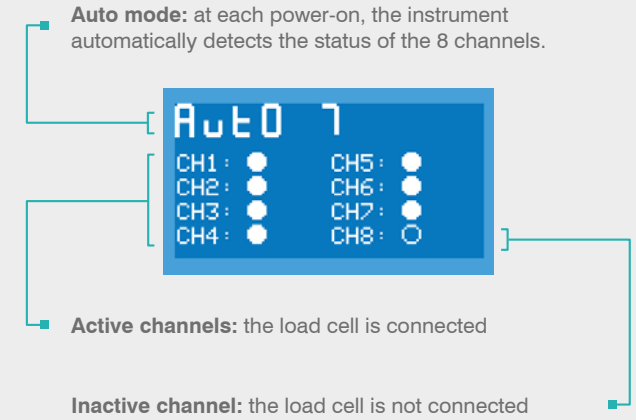

LOAD DISTRIBUTION

The TLM8 displays, in graphical form, the current load distribution on each active channel.

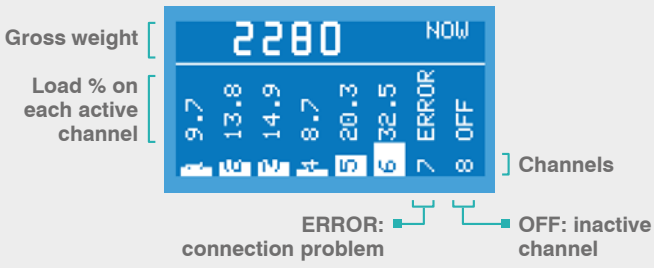

LOAD CELLS INPUT TEST

The TLM8 displays, in graphical form, the load cells response signal in mV for each active channel.

Rev. 0.0

TLM8

WEIGHT TRANSMITTER - 8 INDEPENDENT CHANNELS - WEIGHING AND BATCHING

LAUMAS®

EQUALIZATION WITH JUNCTION BOXES

The equalization with junction boxes and trimmers requires several manual steps and can suffer drift over time, requiring subsequent repetitions of the same procedure.

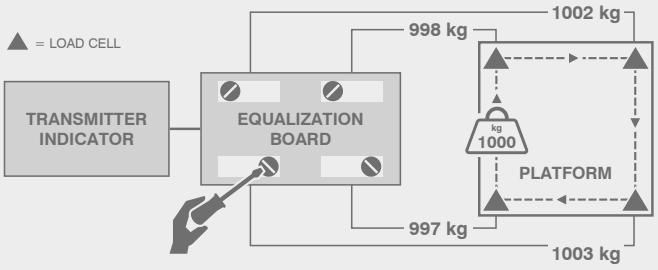

DIGITAL EQUALIZATION

The TLM8 does not require the use of the junction box thanks to the support of 8 independent channels; the digital equalization function simplifies the procedure to a single step and it is free of drift over time.

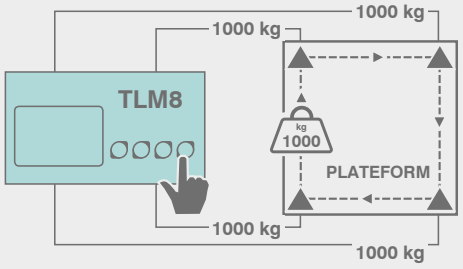

OPTIONS ON REQUEST

	DESCRIPTION		CODE
	Alibi memory.		OPZWALIBI
	AISI 304 stainless steel box; dimensions: 286x206x85 mm		
	- IP68 protection rating. - 10 M12x1.5 cable glands. - Adjustable stainless steel bracket included. - Dimensions with bracket: 290x206x187 mm. - Kit for front panel mounting (option on request).	Available versions: Standard ATEX II 3GD (zone 2-22) IECEx (zone 2-22)	 CASTLM8I CASTLM8I-X CASTLM8I-IEX
	- IP69K front panel protection rating - Hygienic version RPSCQC authorized by 3-A SSI - 6 M12x1.5 cable glands - Supports for front panel mounting included		CASTLM8I3A
	IP67 polycarbonate box; dimensions: 188x188x130 mm (four fixing holes Ø4 mm; centre distance: 164x164 mm)		
	- transparent cover - transparent cover; 8+3 M16x1.5 cable glands - plugs - transparent cover; 8+3 PVC end-fittings for sheath		CASTLG CASTLG8PG9 CASTLG8GUA
	- external keyboard - external keyboard; 8+3 M16x1.5 cable glands - plugs - external keyboard; 8+3 PVC end-fittings for sheath		CASTLGTAST CASTLGTAST8PG9 CASTLGTAST8GUA

Rev. 0.0